



PLASTIC PUTTY

POLYESTER PUTTY

PRODUCT COMPONENTS

PLASTIC – Filling and Finishing. HARDENER for the polyester putty.

PRODUCT DESCRIPTION

2-pack flexible polyester putty for car repairs. It is especially dedicated to repair plastic panels subject to vibrations.

PROPERTIES

- Exhibit good adhesion to plastic.
- Exceptional flexibility.
- Soft sanding properties.
- Easy to sand, creates smooth and pore-free surface.

VOLATILE ORGANIC COMPOUNDS

VOC for the mixture = 150 [g/l]. The product fulfills the EU directive (2004/42/WE) that sets the VOC value for this product category (B/2) as 250 [g/l].


SURFACE PREPARATION

The putty has good adhesion to surfaces made of various kind of plastics (ABS, PC, PPO, PA, RTPU, PBTP, PVC, PUR, UP-GF). The surface should be thoroughly pre-degreased with detergent and grinded using Scotch-Brite. Then it should be again cleaned with detergent, rinsed with water and dried. It is recommended to heat the element in the temperature of 500 C before painting, which will facilitate silicone removing.

CAUTION! Do not apply the putty directly on the reactive primers, 1-pack acrylic and nitrocellulose products.



APPLYING PROCESS

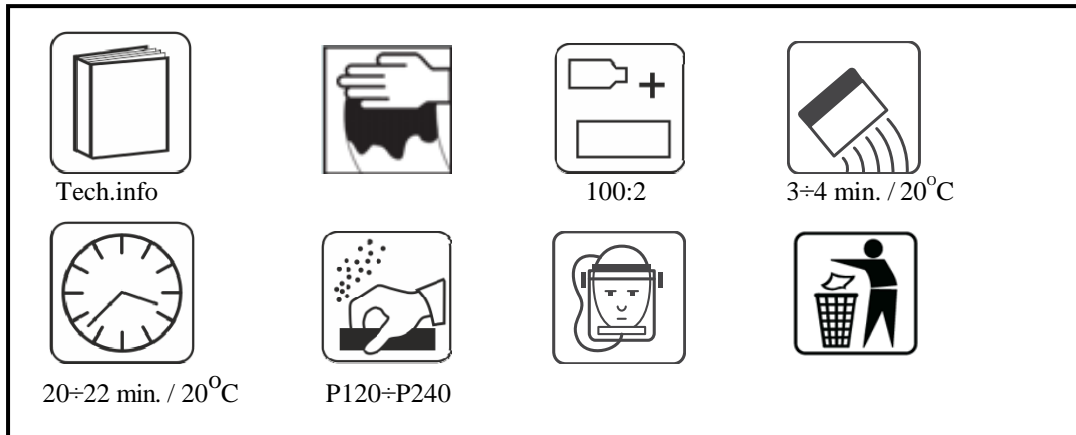

FURTHER WORKS

The putty can be over coated with:

- 2-pack polyester putties
- 2-pack acrylic fillers
- 2-pack epoxy fillers

**CAUTION! To maintain safety, always follow the instructions given in the MSDS for the product. Close the containers immediately after application!
Protect the hardener from overheating!**

GENERAL NOTES

Excessive amounts of hardener can cause problems with bleaching of the topcoat.

- Use the efficient personal protection equipment during the 2K products application. Protect the eyes and air passages.
- The rooms should be well ventilated.
- Tools should be washed directly after application.

STORAGE

Store the product in a sealed container, in dry and cool places, away from fire and heat sources, as well as direct sunlight.