



UNIVERSAL LIGHT PUTTY

POLYESTER PUTTY

PRODUCT COMPONENTS

UNIVERSAL LIGHT – Light polyester finishing putty. Hardener for the polyester putty.

PRODUCT DESCRIPTION

Multifunctional light polyester putty for quality body repairs. Combines filling and finishing properties.

PROPERTIES

- Thanks to its cream consistency it is easy to mix and apply the putty on different surfaces.
- Easy to sand, creates smooth and pore-free surface.
- The putty does not clog sanding paper during treatment.
- Thanks to improved granules the putty has low density that makes it possible to use it on large surfaces.
- The putty dries evenly and completely eliminating subsiding in the future.
- Exhibits good adhesion to metal.

VOLATILE ORGANIC COMPOUNDS

VOC for the mixture = 55 [g/l]. The product fulfills the EU directive (2004/42/WE) that sets the VOC value for this product category (B/2) as 250 [g/l].

SURFACE PREPARATION


The putty has good adhesion to various substrates, it can be applied over:

- Steel and aluminum after flattening and degreasing.
- Zinc-galvanized steel after flattening and degreasing.
- Sanded glass fibre (GFK/GRP), polyester putties, acrylic and epoxy primers.
- Existing coatings in good condition. We recommend sandpaper with gradations P80/P120.

CAUTION! Do not apply the putty directly on the reactive primers, 1-pack acrylic and nitrocellulose products.



APPLYING PROCESS

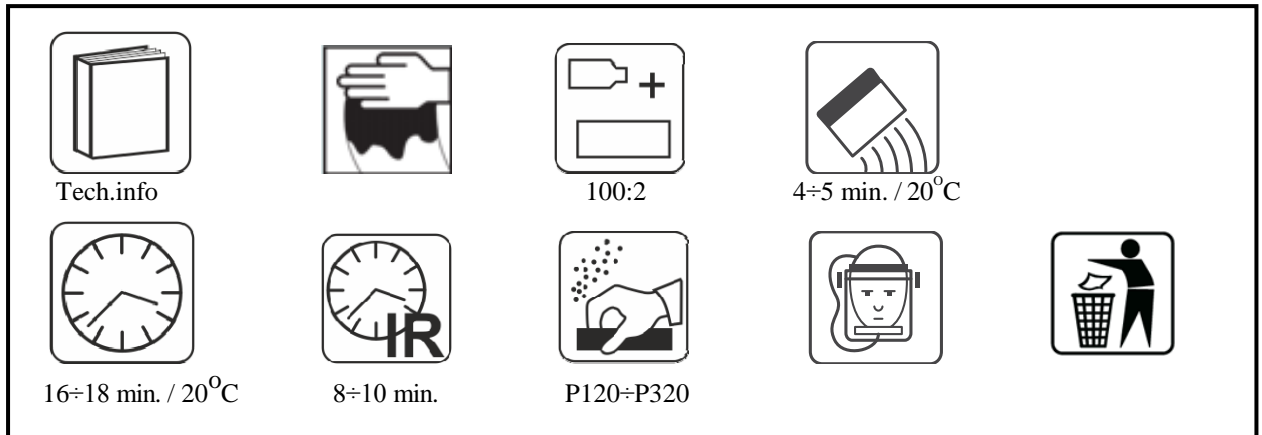

FURTHER WORKS

The putty can be over coated with:

- 2-pack polyester putties
- 2-pack polyester spraying fillers
- 2-pack acrylic primers
- 2-pack epoxy primers
- 2-pack reactive primers

**CAUTION! To maintain safety, always follow the instructions given in the MSDS for the product. Close the containers immediately after application!
Protect the hardener from overheating!**

GENERAL NOTES

Excessive amounts of hardener can cause problems with bleaching of the topcoat.

- Use the efficient personal protection equipment during the 2K products application. Protect the eyes and air passages.
- The rooms should be well ventilated.
- Tools should be washed directly after application.

STORAGE

Store the product in a sealed container, in dry and cool places, away from fire and heat sources, as well as direct sunlight.