



PUTTY FINISH POLYESTER PUTTY

PRODUCT COMPONENTS

FINISH PUTTY – Finishing polyester filler.
Hardener for polyester filler.

PRODUCT DESCRIPTION

2-pack finishing polyester filler for car repair.

PROPERTIES

- Easy to mix and apply.
- Easy to sand, creates smooth and pore-free surface.
- Exhibits good adhesion to various metals.

VOLATILE ORGANIC COMPOUNDS

VOC for the mixture = 115 [g/l].

The product fulfills the EU directive (2004/42/WE), that sets the VOC value for this product category (B/2) as 250 [g/l].

SURFACE PREPARATION

The putty has good adhesion to various surfaces.

The putty can be applied over various surfaces:


- Steel and Aluminum after flatting and degreasing.
- Zinc-galvanized steel after flatting and degreasing.
- Sanded glass fiber (GFK/GRP), polyester putties, acrylic and epoxy primers.
- Existing coatings in good condition.

We recommend sandpaper with gradations P120 ÷ P320.

CAUTION! Do not apply the putty directly on the reactive primers, 1-pack acrylic and nitrocellulose products.



APPLYING PROCESS

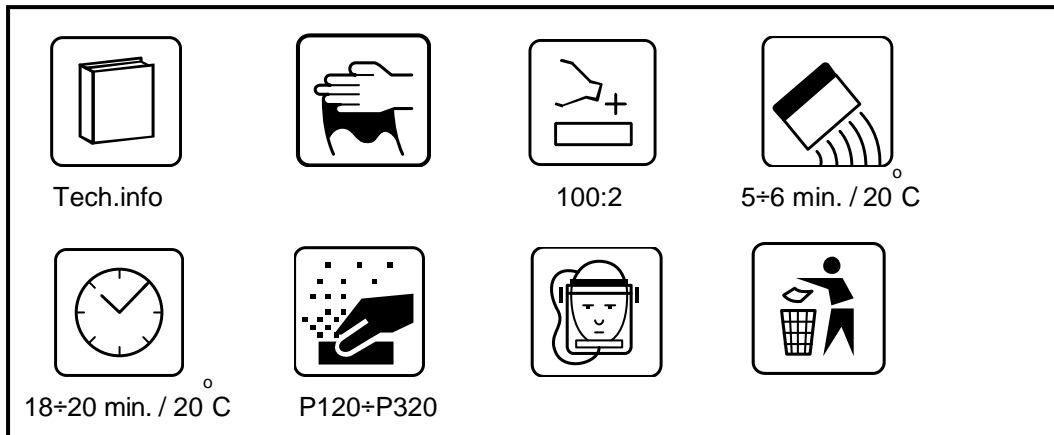

FURTHER WORKS

The putty can be over coated with:

- 2-pack polyester spraying fillers
- 2-pack acrylic primers
- 2-pack epoxy primers
- 2-pack reactive primers

CAUTION! To maintain safety, always follow the instructions given in the MSDS for the product. Close the containers immediately after application! Protect the hardener from overheating!

GENERAL NOTES

Excessive amounts of hardener can cause problems with bleaching of the topcoat.

- Use the efficient personal protection equipment during the 2K products application. Protect the eyes and air passages.
- The rooms should be well ventilated.
- Tools should be washed directly after application.

STORAGE

Store the product in a sealed container, in dry and cool places, away from fire and heat sources, as well as direct sunlight.